




»» MILLS GUARDS

PFR 02

PRODUCT SHEET

Last update:
04/13/2023

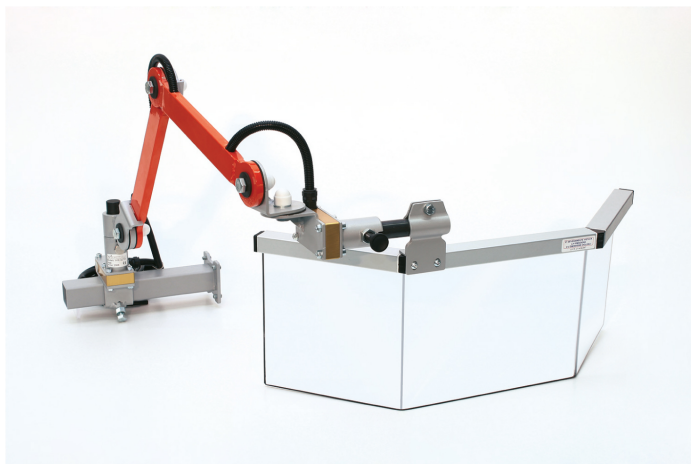

FEATURES

Protects the operator from direct contact with rotating parts of the vertical spindle and from the projection of shavings and lubricant-coolant. Attachable on the base flank, equipped with wide "visibility" shield and double opening system:

- 1) Shield openable vertically with position-locking knob.
- 2) "swinging" total of safety guard, outside field of work.

Complete with double safety microswitch.

- Note: Specify the mounting side by adding the suffix: /DX = Right - /SX = Left

- Available accessories: PMG 60/185 - PBA 01/190 - PBA 01/325 - PBA 02/325

1. Levelling anchorage stirrup - in tubular steel
2. Depth-adjustable safety guard support
3. Safety microswitch main boxes - 180° rotation - n. 2 NC contacts
4. Horizontal adjustment clamp
5. Articulated arms - in tubular steel
6. Rubbing articulation with friction disc
7. Angular junction for the vertical turnover of the shield
8. Shield opening unlocking knob
9. Shield structure - in aluminium profile
10. Shield - in plastic shockproof and oil-resistant material

Thanks to the proven system of rubbing articulated arms, it is the only one to be truly, versatile and manageable. Suitable for frequent changes of operation.

CODE	A	B	C	D	KG
PFR 02/625/...	620	250	170	405	10,4
PFR 02/730/...	725	300	200	430	10,9

Our protections comply with the machinery directive 2006/43/CE

CE
<https://www.tecnopiu.it/>