




»» MILLS GUARDS

# PFR 03

PRODUCT SHEET

Last update:  
04/13/2023

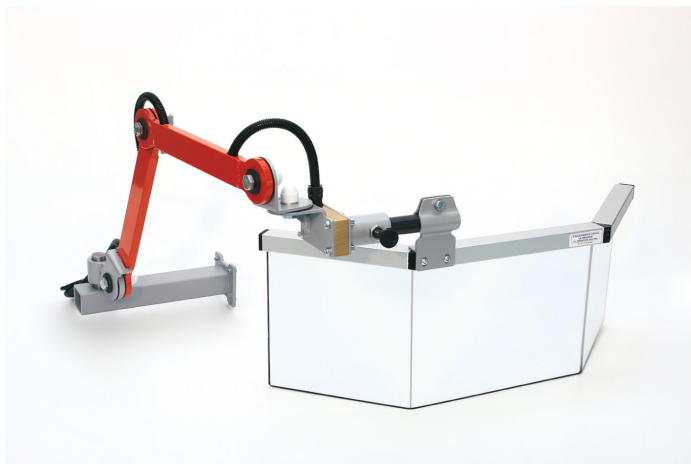

#### FEATURES

Protects the operator from direct contact with rotating parts of the vertical spindle and from the projection of shavings and lubricant-coolant.

Attachable on the base flank, equipped with wide "visibility" shield with vertical opening system and position-unlocking knob.

Complete with safety microswitch.

- Note: Specify the mounting side by adding the suffix: /DX = Right - /SX = Left

- Available accessories: PMG 60/185 - PBA 01/190 - PBA 01/325 - PBA 02/325.

1. Levelling anchorage stirrup - in tubular steel
2. Horizontal adjustment clamp
3. Articulated arms - in tubular steel
4. Rubbing articulation with friction disc
5. Angular junction for the vertical turnover of the shield
6. Safety microswitch main box - 180° rotation - n. 2 NC contacts
7. Shield opening unlocking knob
8. Shield structure - in aluminium profile
9. Shield - in plastic shockproof and oil-resistant material

Universal safety guard with rubbing articulated arms. Practical and manageable. Suitable for frequent changes of operation.

CODE	A	B	C	D	KG
PFR 03/625/...	620	250	170	405	8,9
PFR 03/730/...	725	300	200	430	9,4

Our protections comply with the machinery directive 2006/43/CE

**CE**  
<https://www.tecnopiu.it/>