




»» MILLS GUARDS

# PFR 40

## PRODUCT SHEET

Last update:  
04/13/2023

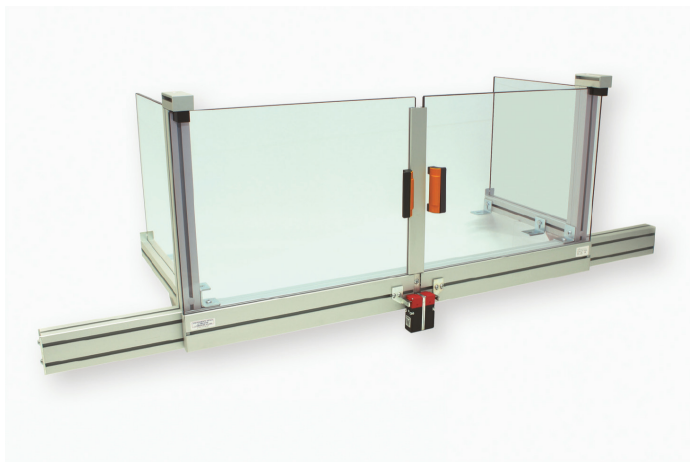

### FEATURES

Protects the operator from direct contact with rotating parts of the spindle and from the projection of shavings and lubricant-coolant.

Equipped with two "total" opening doors, sliding on Polyethylene "skates", made in thick plastic material, "shapeable" for potential vice passage.

Complete with double safety microswitch.

1. Angular anchorage stirrups - in pressed steel
2. Perimeter structure - in aluminium profile
3. Safety microswitches with separated actuator - n. 2 NC contacts
4. Removable lateral panels - in plastic shockproof and oil-resistant material
5. Front panels - in plastic shockproof and oil-resistant material

Equipped with two total opening sliding doors and removable lateral panels. Also customized on request.

CODE	A	B	C	D	KG
PFR 40/545	1000	450	350	1500	20,0
PFR 40/650	1200	500	400	1800	24,0
PFR 40/755	1400	550	450	2100	28,0
PFR 40/860	1600	600	500	2400	32,0
PFR 40/S	-	-	-	-	-

Our protections comply with the machinery directive 2006/43/CE

**CE**  
<https://www.tecnopiu.it/>