




»» MILLS GUARDS

PFR 71

PRODUCT SHEET

Last update:
04/13/2023

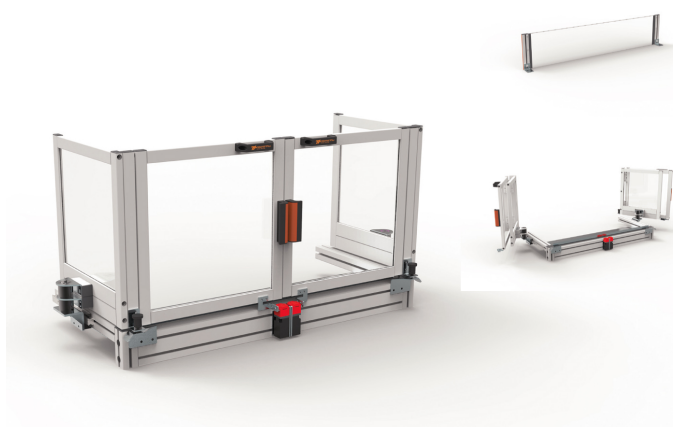

FEATURES

Protects the operator from direct contact with rotating parts of the spindle and from the projection of shavings and lubricant coolant. Attachable on the perimeter of the machine table.

Equipped with two doors with two sections hinged together, that can be opened on a rotating system mounted on a linear guideway, to let the frontal and the lateral sides of the working table of the machine free, when it is open. The shape of the guard allows to use the vise, without having to make openings in the frontal side of the doors. A steel plate, compels to enter with the hands, from the lower side of the guard. Complete with n. 2 safety microswitches.

Complementary items: PFR 70/545/R - PFR/70/650/R

-Rear adjustable protective panel, to cover the rear side behind the spindle.

1. Angular anchorage stirrups - in pressed steel
2. Supporting structure - in aluminium profiles
3. Safety microswitches with separated actuator - n. 2 NC contacts
4. Doors with two hinged sections - In plastic shockproof and oil resistant material
5. Locking piston
6. Rotation door system
7. Protective lower steel plate - in pressed steel
8. Linear guideway - with sliding block

Equipped with two doors (each with two hinged sections), to cover completely the front and the side parts of the working surface, with total opening. With sliding guideways.

CODE	A	B	C	D	KG
PFR 71/545	1000	450	505	405	28,0
PFR 71/650	1200	500	555	455	32,0
PFR 71/S	-	-	-	-	-

Our protections comply with the machinery directive 2006/43/CE

CE
<https://www.tecnopiu.it/>