


## » LATHE GUARDS

# PTO 03

## PRODUCT SHEET

Last update:  
04/13/2023

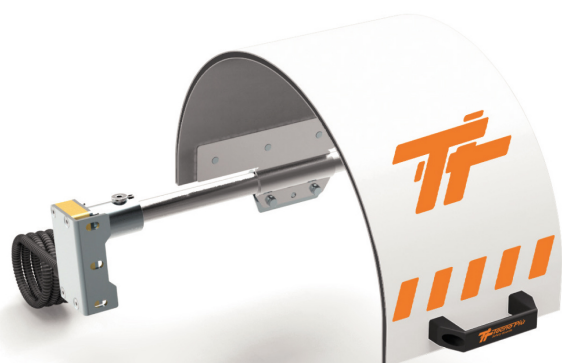

### FEATURES

Protects the operator from direct contact with the upper part of the chuck lathe and from lubricant-coolant projection.  
Frontally and laterally attachable at the base.  
Equipped with semicircular monolithic shield, adjustable until near the machine head.  
Complete with safety microswitch.

1. Frontal and lateral anchorage stirrup
2. Safety microswitch main box - 90° rotation - n. 2 NC contacts
3. Adjustable shield connection clamp with support arm - in pressed steel
4. Monolithic shield in "opaque" composite material: aluminium - hd polyethylene - aluminium

The shield shape makes it ideal to be positioned until near the machine head. Equipped with "opaque" monolithic shield in composite material. Available in various dimensions.

CODE	A	B	C	D	KG.
PTO 03/200	200	200	200	0-200	3,0
PTO 03/300	300	200	200	0-200	3,5
PTO 03/400	400	220	250	0-190	4,2
PTO 03/500	500	240	300	0-180	5,0

Our protections comply with the machinery directive 2006/43/CE

**CE**  
<https://www.tecnopiu.it/>