


## >> DRILLS GUARDS

## **PTR 04**

PRODUCT SHEET



Last update: 04/13/2023

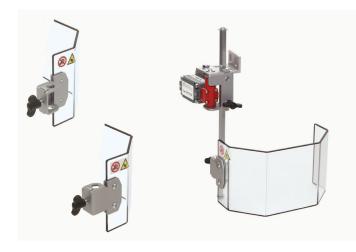

## FFATURES

Protects the operator from direct frontal contact with rotating spindle parts and from projection of shavings and lubricant-coolant. Attachable on the left side of the machine.

The semi-octagonal shield can be adjusted vertically by two different systems: shield-arm group, adjustable through the self-bearing microswitch (point 4). The shield is adjustable through the arm (point 5).

The shield support clamp can be placed inside (point 7) or outside (point 8), allowing a wide range of horizontal adjusting.

Complete with safety microswitch.

- 1. Anchorage stirrup in pressed steel
- 2. Self-bearing safety microswitch 180° rotation n. 2 NC contacts
- 3. Shield support vertical arm in steel hexagon
- 4. Arm-shield adjustment knob as regards the microswitch group
- 5. Shield adjustment knob as regards the supporting arm
- 6. Semi-octagonal shield in polycarbonate

Small item, the only one with a double shield adjustment.

Suitable to be used on Drills, bench Drills and similar machines.

CODE	Α	В	С	KG
PTR 04/140	200	140	100	1,8

Our protections comply with the machinery directive 2006/43/CE



