


» DRILLS GUARDS

PTR 30

PRODUCT SHEET

Last update:
04/13/2023

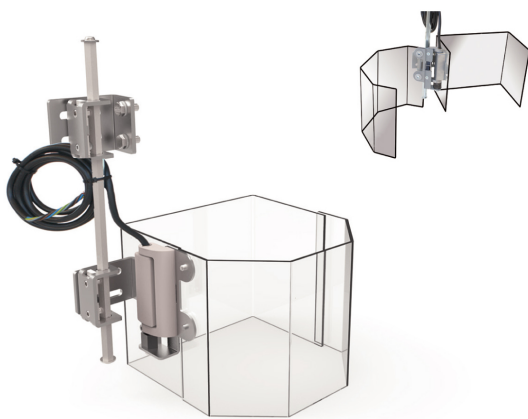

FEATURES

Protects the operator from direct contact with rotating components of the spindle and from projection of shavings and lubricant-coolant. Attachable on the left side of the machine.

The anchorage systems at the machine and the fastening of the shield can be both adjusted for better positioning of the guard according to position of the spindle.

Complete with safety microswitch integrated in the hinge of the shield.

1. Anchorage stirrup - in pressed steel
2. Shield support hinge with integrated microswitch - n. 2 NC contacts
3. Shield support vertical arm - in steel hexagon
4. Adjustable stirrup for support anchorage - allows adjustment towards Left
5. Adjustable stirrup for shield support - allows adjustment towards Right
6. Semi-octagonal polycarbonate front shield
7. "C" shaped rear shield

Universal and solid item with rear protection and lateral opening of the shield with hinge equipped with integrated microswitch.

CODE	A	B	C	KG
PTR 30/130	220	130	235	2,7
PTR 30/180	220	180	235	3,0

Our protections comply with the machinery directive 2006/43/CE

CE
<https://www.tecnopiu.it/>